


Double Acting Pullpac Cylinders

700 Kg/Cm²

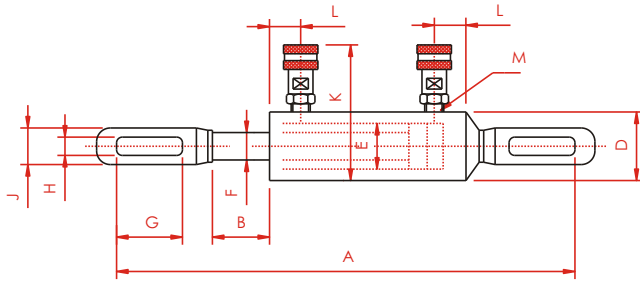

- Pulling Jack/ Ram/ Cylinders used for joining sheets for welding where previously installed hooks are available.
- Useful for fabrication industry and for cable tightening applications.
- Hard chrome plated steel piston rod.
- Female half coupler & dust cap provided on all models.
- Please contact nearest dealer for cylinders with capacities & strokes not mentioned in the data sheets. All variations are possible on request, subject to confirmation from the dealer

CAPACITY	10 TONNE TO 100 TONNE
STROKE	65 MM TO 150 MM
TYPE OF RAM	PLAIN

MODEL	Capacity		Effective Area cm ²	VOL cm ³	Dimension in mm											Approx. Weight kg.	SEAL KIT MODEL
	Tonnes	KN			A	B STROKE	D	E	F	G	H	J	K	L	M		
YR010150	10	100	15.7	236	719	150	85	60	40	100	30	67	147	47	3/8" NPT	14	YRSK - 10
YR030065	30	300	42.7	278	709	65	115	88	48	159	40	114	177	55	3/8" NPT	26	YRSK - 30
YR030150				640	879	150	115	88	48	159	40	114	177	55	3/8" NPT	29	
YR050150	50	500	75.6	1135	861	150	155	115	60	125	50	130	217	65	3/8" NPT	45	YRSK - 50
YR100150	100	1000	143.5	2153	971	150	200	150	65	170	50	170	262	70	3/8" NPT	88	YRSK - 100

Suitable handle shall be provided with cylinders whose weight is more than 20 kg.

Note : The right to change any specification without notice is reserved because of constant R&D and product upgradation.

